


Architectural Metal Roofing Panels

SSQ-550 1.5" Snaplock Standing Seam

Panel Information:


Panel Type:	Standing Seam
Panel Seam:	SnapLock
Panel Width:	12"-24"
Seam Height:	1.5"
Panel Material:	22GA - 24GA - 26GA Min
Panel Surface:	Smooth/Optional Stiffing Ribs
Panel Clip:	Required Per Engineering
Minimum Slope:	2/12
Substrate:	Plywood

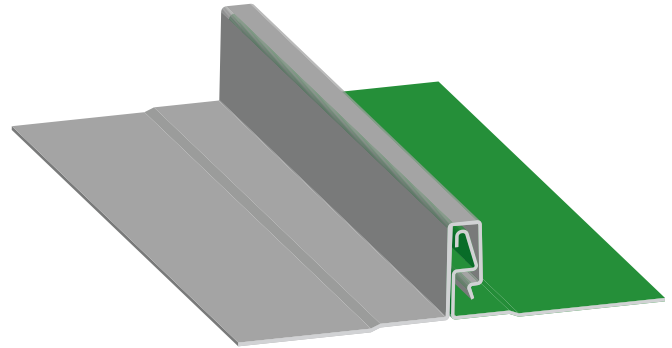

Panel Testing:

Uplift Resistance:	*UL 580, UL 1897, UL 90
Air Infiltration:	*ASTM E 1680
Water Penetration:	*ASTM E 1646
Hail Rating:	*Class 4 Impact UL 2218
Fire Rating:	*UL Class A
FBC Non-HVHZ Approval:	*FL18316

(*Testing Available with Specific Materials only)

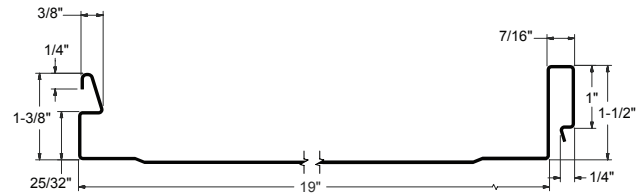

Panel Notes:

- With this 24 GA, 19" wide panel engineering, you may opt to use heavier gauge coil and narrower width panels. Clip spacing will not change.
- This panel uses a 24" coil. Maximum width coil of 24".
- This panel uses 5-1/8" of material to form the panel.
- If you take a square footage of the roof and multiply that by 1.27, the total will be the amount of coil needed to manufacture the panels.
- This panel is approved for Weathertight Warranties.

